



PIE DE APOYO "PH"

Double acting crutch "PH" / Vérin béquille "PH" / Stützzylinder "PH"

cicrosa hidráulica S.L.

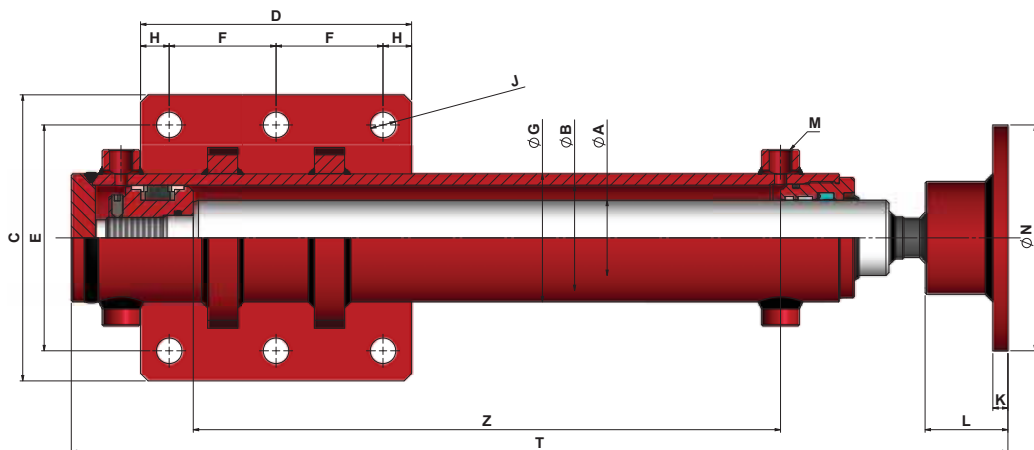

REF	A	B	Z	T	G	C	D	E	F	H	J	L	K	N	M BSP	Vol. (L)	PESO WEIGHT POIDS GEWICHT (kg)
PHE5070300	50	70	300	532	85	190	180	150	71	19	17	60	10	150	3/8	1.15	22.9
PHE5070350	50	70	350	582	85	190	180	150	71	19	17	60	10	150	3/8	1.35	24.4
PHE5070400	50	70	400	632	85	190	180	150	71	19	17	60	10	150	3/8	1.54	25.9
PHE5070450	50	70	450	682	85	190	180	150	71	19	17	60	10	150	3/8	1.73	27.3

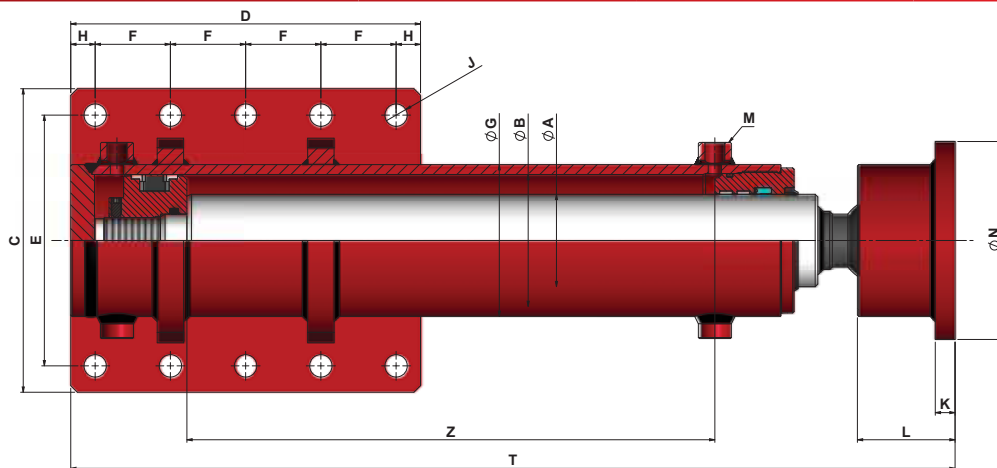

REF	A	B	Z	T	G	C	D	E	F	H	J	L	K	N	M BSP	Vol. (L)	PESO WEIGHT POIDS GEWICHT (kg)
PH6080350	60	80	350	610	95	230	265	190	57	18.5	17	62	10	150	3/8	1.76	34
PH6080400	60	80	400	660	95	230	265	190	57	18.5	17	62	10	150	3/8	2.01	35.9
PH6080450	60	80	450	710	95	230	265	190	57	18.5	17	62	10	150	3/8	2.26	37.8
PH6080500	60	80	500	760	95	230	265	190	57	18.5	17	62	10	150	3/8	2.51	39.7
PH6080550	60	80	550	810	95	230	265	190	57	18.5	17	62	10	150	3/8	2.76	41.7
PH6090400	60	90	400	670	105	230	265	190	57	18.5	17	67	15	150	3/8	2.54	39.6
PH6090500	60	90	500	770	105	230	265	190	57	18.5	17	67	15	150	3/8	3.18	43.6
PH6090600	60	90	600	870	105	230	265	190	57	18.5	17	67	15	150	3/8	3.82	47.6
PH70100400	70	100	400	670	115	230	265	190	57	18.5	17	74	15	150	3/8	3.14	47.3
PH70100500	70	100	500	770	115	230	265	190	57	18.5	17	74	15	150	3/8	3.93	52.3
PH70100600	70	100	600	870	115	230	265	190	57	18.5	17	74	15	150	3/8	4.71	57.3
PH70100700	70	100	700	970	115	230	265	190	57	18.5	17	74	15	150	3/8	5.50	62.3

CARACTERÍSTICAS / CHARACTERISTICS / CARACTERISTIQUES / EIGENSCHAFTEN

- ▶ Doble efecto.
- ▶ Plato oscilante para mejor adaptación a terrenos desnivelados.
- ▶ Dobles entradas de aceite para facilitar conexiones.
- ▶ Opcional: válvula anti-retorno.
- ▶ Double acting.
- ▶ Swivel plate for a better adaptation to uneven grounds.
- ▶ Double oil inlets to ease connections.
- ▶ Optional: check-valve set.
- ▶ Double effet.
- ▶ Plateau inclinable pour une meilleure adaptation aux terrains accidentés.
- ▶ Doubles entrées d'huile pour faciliter les raccordements.
- ▶ En option : clapet anti-retour.
- ▶ Doppeltwirkend.
- ▶ Schwenkbare Stützscheibe zur besseren Anpassung an unebenes Gelände.
- ▶ Doppelte Öleinlässe, um das Anschließen zu erleichtern.
- ▶ Optional: Rückschlagventil.